
Product or Component Type

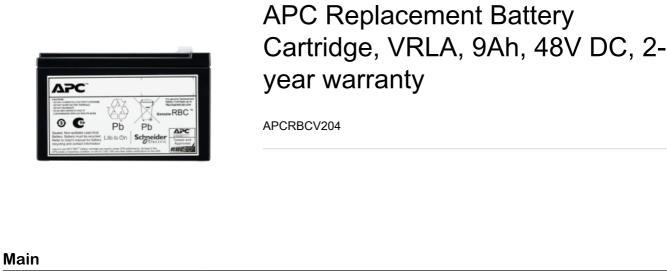

Replacement battery cartridge

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Main Output Voltage 48 V DC Number of rack unit 0U Battery Type VRLA Physical Height 2.55 in (64.8 mm) Width 5.94 in (150.9 mm) Depth 3.88 in (98.6 mm) Net Weight 22.05 ib(US) (10 kg) Mounting Mode Not rack-mountable USB compatible No Output Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 099 % non-condensing Ambient Air Temperature for Storage 5113 °F (-1545 °C) Storage Relative Humidity 0.009842.52 ft (03000 m) Storage Relative Humidity 095 % non-condensing		
Physical	Main Output Voltage	48 V DC
Physical Height 2.55 in (64.8 mm) Width 5.94 in (150.9 mm) Depth 3.88 in (98.6 mm) Net Weight 22.05 lb(US) (10 kg) Mounting Mode Not rack-mountable USB compatible No Output Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage 5113 "F (-1545 °C) Storage altitude 0.009842.52 ft (03000 m)	Number of rack unit	0U
Height 2.55 in (64.8 mm) Width 5.94 in (150.9 mm) Depth 3.88 in (98.6 mm) Net Weight 22.05 ib(US) (10 kg) Mounting Mode Not rack-mountable USB compatible No Output Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage 5113 °F (-1545 °C) Storage altitude 0.009842.52 ft (03000 m)	Battery Type	VRLA
Height 2.55 in (64.8 mm) Width 5.94 in (150.9 mm) Depth 3.88 in (98.6 mm) Net Weight 22.05 ib(US) (10 kg) Mounting Mode Not rack-mountable USB compatible No Output Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage 5113 °F (-1545 °C) Storage altitude 0.009842.52 ft (03000 m)		
Width 5.94 in (150.9 mm) Depth 3.88 in (98.6 mm) Net Weight 22.05 lb(US) (10 kg) Mounting Mode Not rack-mountable USB compatible No Output Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage 5113 °F (-1545 °C) Storage altitude 0.009842.52 ft (03000 m)	Physical	
Depth 3.88 in (98.6 mm) Net Weight 22.05 lb(US) (10 kg) Mounting Mode Not rack-mountable USB compatible No Output Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage Storage altitude 0.009842.52 ft (03000 m)	Height	2.55 in (64.8 mm)
Net Weight 22.05 b(US) (10 kg) Mounting Mode Not rack-mountable USB compatible No Output Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage Storage altitude 0.009842.52 ft (03000 m)	Width	5.94 in (150.9 mm)
Mounting Mode Not rack-mountable No Output Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage Storage altitude 0.009842.52 ft (03000 m)	Depth	3.88 in (98.6 mm)
Output Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for 5113 °F (-1545 °C) Storage altitude 0.009842.52 ft (03000 m)	Net Weight	22.05 lb(US) (10 kg)
Output Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for 5113 °F (-1545 °C) Storage altitude 0.009842.52 ft (03000 m)	Mounting Mode	Not rack-mountable
Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for 5113 °F (-1545 °C) Storage Storage altitude 0.009842.52 ft (03000 m)	USB compatible	No
Battery Capacity 9 Ah Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for 5113 °F (-1545 °C) Storage Storage altitude 0.009842.52 ft (03000 m)		
Conformance Product Certifications CB Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage Storage altitude 0.009842.52 ft (03000 m)	Output	
Environmental Ambient Air Temperature for Operation Operating altitude Relative Humidity O90 % non-condensing Ambient Air Temperature for 5113 °F (-1545 °C) Storage altitude 0.009842.52 ft (03000 m)	Battery Capacity	9 Ah
Environmental Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage Storage altitude 0.009842.52 ft (03000 m)	Conformance	
Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage Storage altitude 0.009842.52 ft (03000 m)	Product Certifications	СВ
Ambient Air Temperature for Operation Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage Storage altitude 0.009842.52 ft (03000 m)		
Operating altitude 06561.68 ft (02000 m) Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage 5113 °F (-1545 °C) Storage altitude 0.009842.52 ft (03000 m)	Environmental	
Relative Humidity 090 % non-condensing Ambient Air Temperature for Storage 5113 °F (-1545 °C) Storage altitude 0.009842.52 ft (03000 m)		32104 °F (040 °C)
Ambient Air Temperature for Storage 5113 °F (-1545 °C) Storage altitude 0.009842.52 ft (03000 m)	Operating altitude	06561.68 ft (02000 m)
Storage Storage altitude 0.009842.52 ft (03000 m)	Relative Humidity	090 % non-condensing
		5113 °F (-1545 °C)
Storage Relative Humidity 095 % non-condensing	Storage altitude	0.009842.52 ft (03000 m)
	Storage Relative Humidity	095 % non-condensing
Batteries & Runtime	Ratteries & Puntime	

Battery Placement

Internal Battery

Battery blocks per string	4
Battery Slots Empty	0
Included Battery Modules	0
Battery Voltage	48V
RBC Quantity	1

Replacement battery

Ordering and shipping details

GTIN 731304451068

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.83 in (275 mm)
Package 1 Width	7.48 in (190 mm)
Package 1 Length	16.73 in (425 mm)
Package 1 Weight	24.03 lb(US) (10.9 kg)

Offer Sustainability

REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty 2 Years

Recommended replacement(s)