Number of rack unit

Battery Type

Physical Height

Width

Depth

Net Weight

Output

Mounting Mode

USB compatible

Battery Capacity

Conformance
Product Certifications

Environmental

Operating altitude

Relative Humidity

Storage altitude

Operation

Storage

Ambient Air Temperature for


Ambient Air Temperature for

Storage Relative Humidity

Batteries & Runtime

Battery blocks per string

Battery Placement

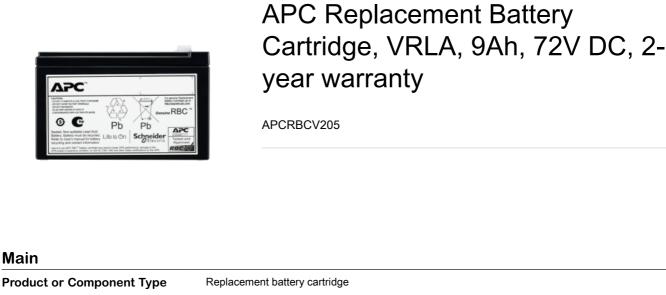

VRLA

2.55 in (64.8 mm)

5.94 in (150.9 mm)

3.88 in (98.6 mm)

33.07 lb(US) (15 kg)

Not rack-mountable

32...104 °F (0...40 °C)

0...6561.68 ft (0...2000 m)

0...90 % non-condensing

5...113 °F (-15...45 °C)

0.00...9842.52 ft (0...3000 m)

0...95 % non-condensing

Internal Battery

6

9 Ah

СВ

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Battery Slots Empty	0
Included Battery Modules	0
Battery Voltage	72V
RBC Quantity	1

Replacement battery

Ordering and shipping details

GTIN 731304451075

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	14.17 in (360 mm)
Package 1 Width	7.09 in (180 mm)
Package 1 Length	17.13 in (435 mm)
Package 1 Weight	35.05 lb(US) (15.9 kg)

Offer Sustainability

REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty 2 Years

Recommended replacement(s)