Getac


Getac recommends Windows 11 Pro for business



V110 FULLY RUGGED Notebook

- 12th Generation Intel[®] Core[™] i7 / i5 vPro[®] Processor
- 11.6" FHD LumiBond[®] display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Enhanced enterprise security with Intel[®] vPro[®], Windows disk encryption, TPM 2.0 and many more multi-factor authentication options
- Versatile I/Os connectivity including Thunderbolt™ 4 and docking solutions
- LifeSupport[™] battery swappable technology



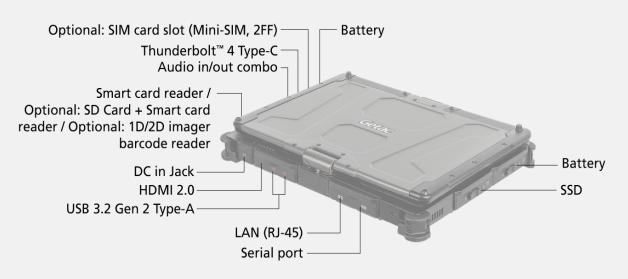

SPECIFICATIONS

Operating System Windows 11 Pro

Mobile Computing Platform

Intel[®] Core™ i5-1235U Processor Max. 4.4GHz with Intel[®] Turbo Boost Technology - 12MB Intel[®] Smart Cache

Platform options: Intel[®] Core™ i5-1245U vPro[®] Processor Max. 4.4GHz with Intel[®] Turbo Boost Technology - 12MB Intel[®] Smart Cache

Intel[®] Core™ i7-1255U Processor Max. 4.7GHz with Intel[®] Turbo Boost Technology - 12MB Intel[®] Smart Cache

Intel[®] Core™ i7-1265U vPro[®] Processor Max. 4.8GHz with Intel[®] Turbo Boost Technology - 12MB Intel[®] Smart Cache

VGA Controller Intel[®] Iris[®] X^e Graphics

Display 1.1.6" Wide Viewing Angle TFT LCD FHD (1920 x 1080) Protection film 1,000 nits LumiBond® display with Getac sunlight readable

technology Capacitive multi-touch screen

Storage & Memory 8GB DDR4 Optional: 16GB / 32GB / 64GB DDR4

256GB PCIe NVMe SSD Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard LED backlit membrane keyboard

Optional: Rubber keyboard Power button 5 tablet programmable buttons

Pointing Device

Touchscreen - Capacitive multi-touch screen - Optional: Dual mode touchscreen (multi-touch and digitizer) Touchpad

Glide touchpad with left-click and right-click buttons

Expansion Slots Smart card reader

Optional: SD Card + Smart card reader " Optional: 1D/2D imager barcode reader "

I/O Interface

I/O Interface FHD webcam x 1 ^{III} Audio in/out combo x 1 DC in Jack x 1 Thunderbolt[™] 4 Type-C x 1 USB 3.2 Gen 2 Type-A x 2 LAN (R145) x 1 HDMI 2.0 x 1 Serial port (9-pin; D-sub) x 1 Parking compactor x 1 Serial port (9-pin; D-Sub) x 1 Docking connector x 1 Optional: SIM card slot x 1 (Mini-SIM, 2FF) ^{to} Optional: Windows Hello face-authentication camera (front-facing) x 1th Optional: RF antenna pass-through for GPS, WWAN and WLAN Optional: 8M pixels auto focus rear camera x 1

Communication Interface

10/100/1000 base-T Ethernet Intel[®] Wi-Fi 6E AX211, 802.11ax Bluetooth (v5.3) ' Optional: Dedicated GPS ^{vii} Optional: 4G LTE mobile broadband ^{vi, iv, xvi} Optional: 5G Sub-6 ^{liv, vi, xvi} Dual SIM (Mini-SIM 2FF and e-SIM)

Security Features

TPM 2.0 Kensington lock Optional: Intel® vPro® Technology Optional: Fingerprint reader Optional: HF RFID reader^{vii} Smart card reader Optional: Windows Hello face-authentication camera (front-facing)

Power

AC adapter (65W, 100-240VAC, 50/60Hz) Li-ion battery (11.1V, typical 2100mAh; min. 2040mAh) x 2 LifeSupport™ battery swappable technology

Dimension (W x D x H) & Weight 313 x 238 x 39mm (12.32" x 9.37" x 1.53") 2.1kg (4.63lbs) ^{viii}

Rugged Features MIL-STD-810H certified

IP65 certified IP65 certified MIL-STD-461G certified [™] Vibration & 4ft (1.2m) drop resistant [×] Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) [™] Optional: Salt fog certified

Environmental Specifications

Temperature ^{#1}: - Operating: -29°C to 63°C / -20°F to 145°F - Storage: -51°C to 71°C / -60°F to 160°F Humidity: 95% RH, non-condensing

Pre-installed Software

Getac Utility Getac Camera Getac Geolocation Getac Barcode Manager XIII Optional: Absolute Persistence

Optional Software

Getac Driving Safety Utility Getac Device Monitoring System (GDMS) Getac VGPS Utility *

Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh) AC adapter (65W, 100-240VAC) Capacitive stylus with tether

Optional:

Optional: Carry bag Battery (11.1V, typical 2100mAh; min. 2040mAh) Multi-Bay charger (Dual-Bay) Multi-Bay charger (Eight-Bay) AC adapter (65W, 100-240VAC) Office dock AC adapter (90W, 100-240VAC) MIL-STD-461 AC adapter (90W, 100-240VAC) DC-DC vehicle adapter (120W, 11-32VDC) Digitizer pen Capacitive stylus with tether Protection film Hard handle Hard handle X strap Shoulder strap (2-point) Vehicle cradle ³⁰ Vehicle dock ³⁰ Office dock Spare SSD kit 100W Type-C adapter Getac rugged keyboard

Bumper-to-Bumper Warranty Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 vears Bumper-to-Bumper

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

V110 FULLY **RUGGED NOTEBOOK**

- ١.
- Units equipped with dual channel memory come with Intel[®] Iris[®] X^e Graphics. Smart card reader, Optional SD card + Smart card reader, and Optional 1D/2D imager barcode reader are mutually exclusive. FHD webcam and optional Windows Hello face-withoriting camper (from facing) are mutually Ш Ш.
- IV
- are mutually exclusive. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options. Units with 4G/SG LTE option come with an embedded SIM card slot. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers. 13.56MHz contactless HF RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant). Weight and dimensions vary from configurations and optional accessories. MIL-STD-A61 90W AC adapter sold separately. Drop test results vary from configurations and optional accessories. Available with limited configurations and environment conditions. Tested by an independent third-party test lab V.
- VI.
- VII. VIII.
- IX. Х
- XI.
- XII.
- environment conditions. Tested by an independent third-party test lab following MIL-STD-810H. Available when barcode reader option is selected. Models require either embedded or standalone GPS
- XIII. XIV. module.
- ХV Gamber Johnson and Havis vehicle docks are e-mark certified. XVI. Support GPS, GLONASS, Galileo, and BeiDou.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.





GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist., Taipei City, 115018, Taiwan, R.O.C. Tel : +886 2 2785 7888 globalmarketing@getac.com l

www.getac.com Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.