



by Schneider Electric

Basic Rack PDU for Blade Servers (AP7526)


Overview

The American Power Conversion (APC™) Basic Rack Power Distribution Unit (PDU) for Blade Servers distributes power to devices in the rack.

Outlets. The PDU has six (6) IEC-320-C19 outlets.

Power cord. The 8-ft (2.43-m) power cord terminates with an IEC-309 32 A connector.

AP7526

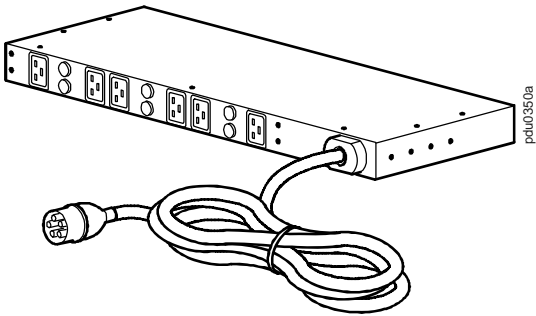

Specifications

Electrical

Input connector	IEC-309, 32 A connector
Output connectors	(6) IEC-320-C19
Overload protection	(6) 16-A single-pole breakers
Max output current (outlet)	16 A
Max output current (phase)	32 A
Cord length	8 ft (2.43 m)
Nominal input voltage	400 VAC, 3-phase
Acceptable input voltage	±10% of nominal voltage
Input frequency	50/60 Hz

Physical

Dimensions (H × W × D)	1.72 × 17.20 × 10.00 in (4.36 × 43.68 × 25.40 cm)
Shipping dimensions (H × W × D)	9.50 × 22.00 × 19.75 in (24.13 × 55.88 × 50.16 cm)
Weight	10.65 lb (4.83 kg)
Shipping weight	15.35 lb (6.96 kg)

Environmental

Elevation (above MSL)	
Operating	10,000 ft (3000 m)
Storage	50,000 ft (15 000 m)
Temperature	
Operating	23 to 113°F (-5 to 45°C)
Storage	-13 to 149°F (-25 to 65°C)
Humidity	
Operating	5–95%, non-condensing
Storage	5–95%, non-condensing

Approvals

Safety Certification	VDE, CE Mark, GOST IEC-60950, Queensland Australia
----------------------	--

Customer support and warranty information is available at the APC Web site, www.apc.com.

© 2011 APC by Schneider Electric. All trademarks are owned by Schneider Electric Industries S.A.S., American Power Conversion Corporation, or their affiliated companies.